


Vcan1816 application

Simplex

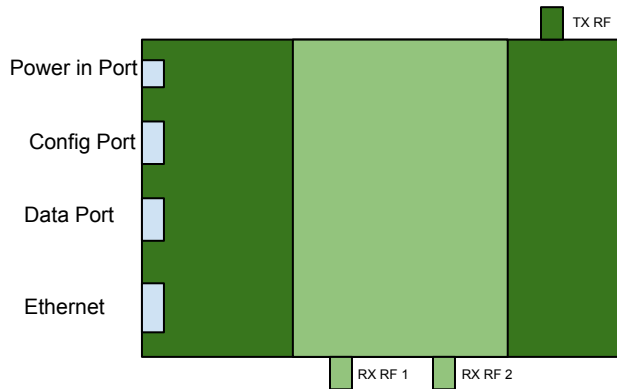

Transmitter: 70Mhz~4000Mhz
Receiver: 160Mhz~860Mhz
(frequency downconverter
For example from 3500Mhz to 500Mhz)


PA: 20~30Watt

Data Port: TTL (TTL↔RS232)
19200, 57600, 115200 bps

Config Port: Change Parameter
via computer AT commands or tool
(Frequency, bandwidth, encryption etc)

Ethernet Port: 2M~8M bandwidth

Simplex

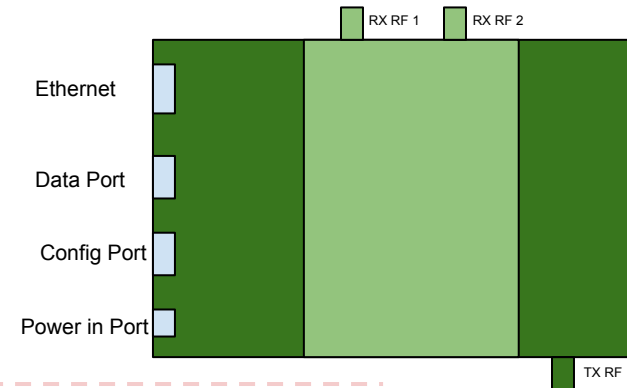

Transmitter: 70Mhz~4000Mhz
Receiver: 160Mhz~860Mhz
(frequency downconverter
For example from 3500Mhz to 500Mhz)

PA: 20~30Watt

Data Port: TTL (TTL↔RS232)
19200, 57600, 115200 bps

Config Port: Change Parameter
via computer AT commands or tool
(Frequency, bandwidth, encryption etc)

Ethernet Port: 2M~8M bandwidth

Vcan1816 does not support FHSS, but support change frequency via config port AT commands or extra tool.